


ZECK

SWITCH TO ZECK SWITCH



ENTER THE WORLD OF BOLD LIVING & SHEER COMFORT

TOUCH. **CONTROL.** RELAX.

COMPATIBLE WITH



ABOUT US

With this changing era of our world which is stepping towards the future of smart home automation, All our basic necessities have been moved towards smart operations facilitating our routines and making our life easier to operate our gadgets and appliances smartly.

Incorporated in the year 2014, we initially came up with the throbbing version of our capacitive touch switch modules which can be operated with a remote controller. With the need of the hour and relentless research and development, our team gave immense efforts to provide the best in segment product SMART TOUCH SWITCH proudly manufactured by our company, ZECK PRIVATE LIMITED.

Presently we at ZECK are engaged with the OEM manufacturing of our smart touch switches catering to several known brands in India. Our products are integrated with all the latest technologies like WIFI, Bluetooth, Voice assistant control, etc, and come with standard modular designs. We also have enhanced facilities to provide our valued customers with the options of customization and branding. Our existing range has Four distinct options to fulfill all the requirements in the world of smart touch switches.

GOLD - WF

GOLD - BT

AROMA - WF

AROMA - BT







”



**A perfect blend of
INTELLIGENCE &
LUXURY**

BLACK COLLECTION



WHITE COLLECTION



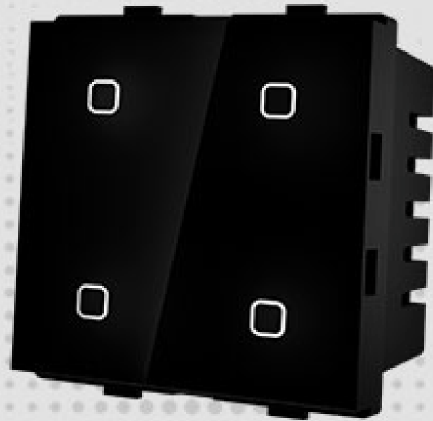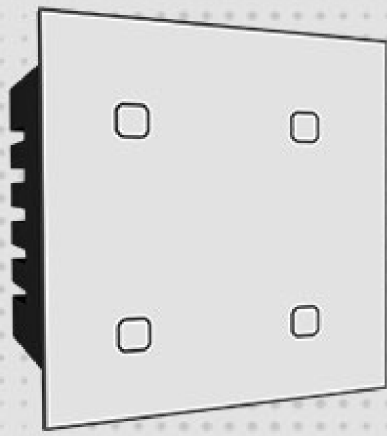

4 - SWITCHES

TECHNICAL SPECIFICATION

Input Voltage:
230V~50/60Hz

Wireless Type:
Wi-Fi 2.4Ghz
(Signal Strength $\geq 75\%$)

Size:
2 Modular


Touch Surface ambient temp.:
30°C to 48°C

Working temp.:
-10°C to 70°C

Rated Load:
Inductive load
450 w

Approximate Weight:
85gms

Maximum Dimension:
48mm*50mm*50mm

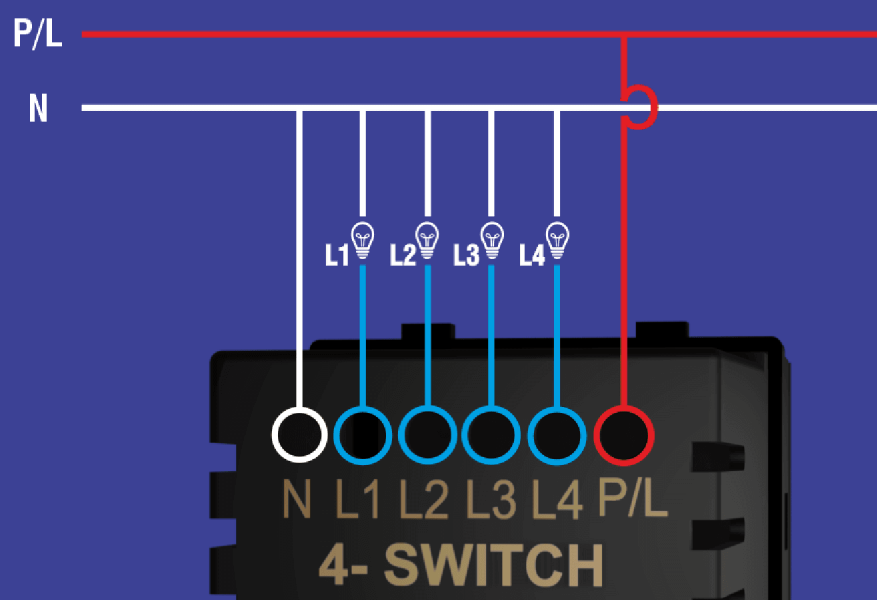

2 - SWITCHES

TECHNICAL SPECIFICATION

Input Voltage:

230V~50/60Hz

Working temp.:

-10°C to 70°C

Wireless Type:

Wi-Fi 2.4Ghz

(Signal Strength $\geq 75\%$)

Rated Load:

Inductive load

2000 w

Size:

2 Modular

Approximate Weight:



85gms


Touch Surface ambient temp.:


30°C to 48°C

Maximum Dimension:

48mm*50mm*50mm

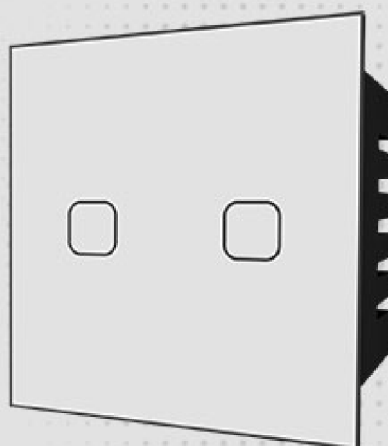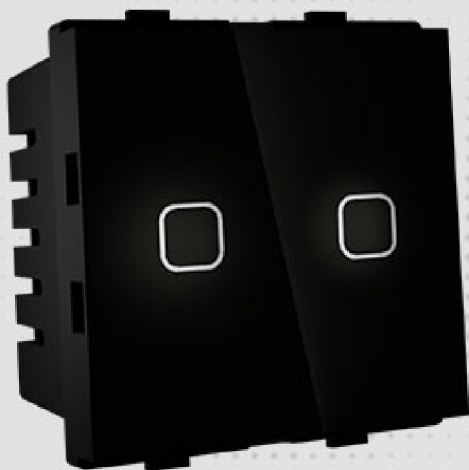

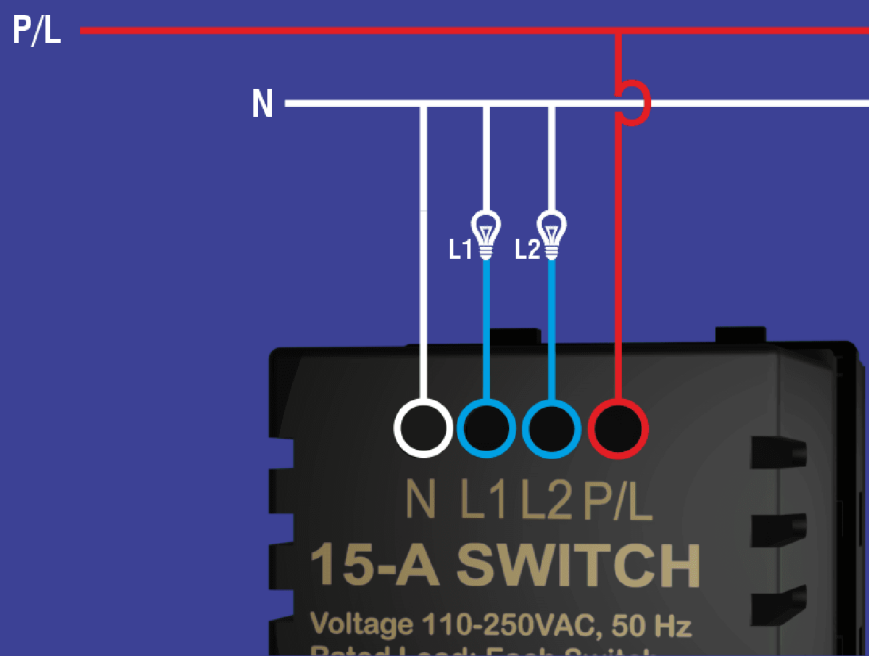

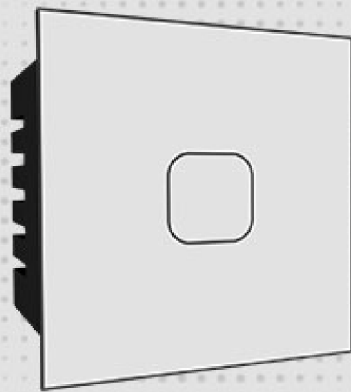

1 - SWITCHES

TECHNICAL SPECIFICATION

Input Voltage:
230V~50/60Hz

Wireless Type:
Wi-Fi 2.4Ghz
(Signal Strength $\geq 75\%$)

Size:
2 Modular



Touch Surface ambient temp.:
30°C to 48°C

Working temp.:
-10°C to 70°C

Rated Load:
Inductive load
3500 w

Approximate Weight:
85gms

Maximum Dimension:
48mm*50mm*50mm

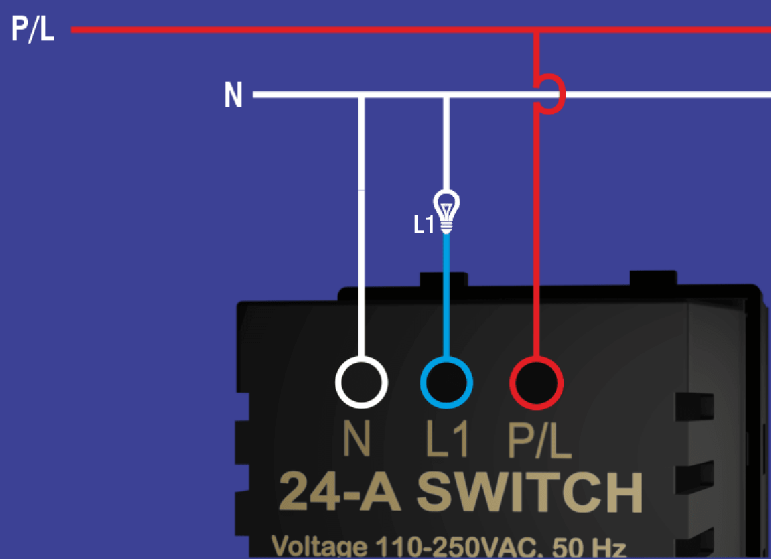

2 - WAY SWITCHES

TECHNICAL SPECIFICATION

Input Voltage:

230V~50/60Hz

Working temp.:

-10°C to 70°C

Wireless Type:

Wi-Fi 2.4Ghz

(Signal Strength $\geq 75\%$)

Rated Load:

Inductive load

450 w

Size:

2 Modular

Approximate Weight:



85gms


Touch Surface ambient temp.:


30°C to 48°C

Maximum Dimension:

48mm*50mm*50mm

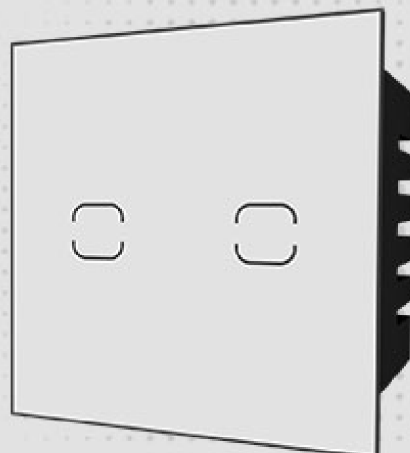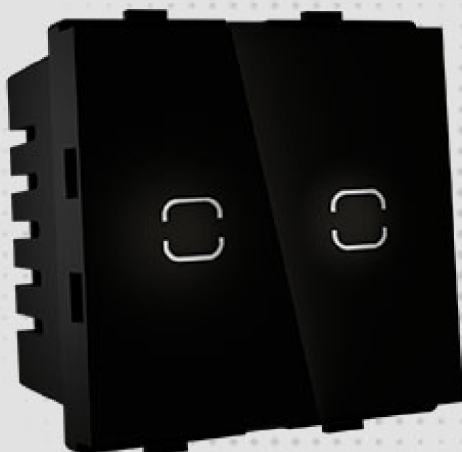

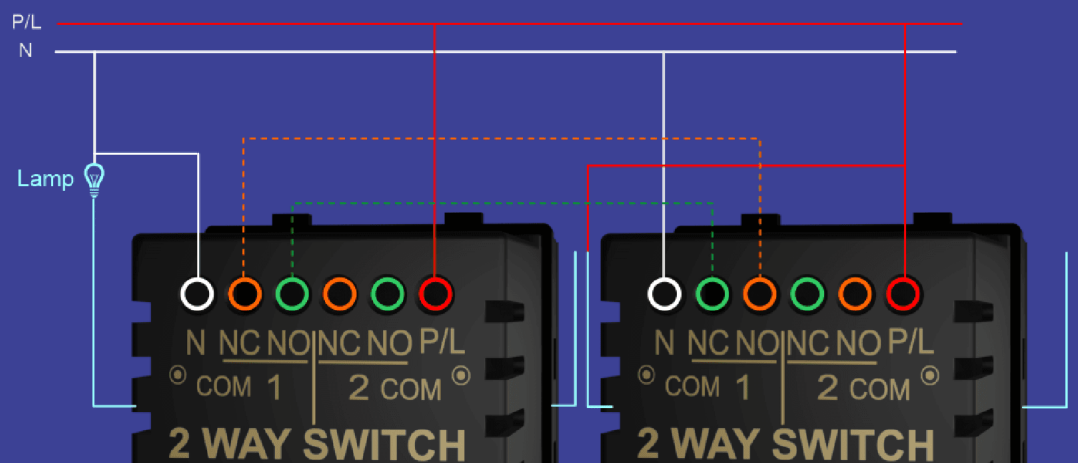

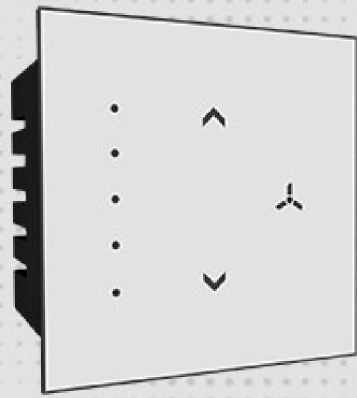

FAN REGULATOR

TECHNICAL SPECIFICATION

Input Voltage:

230V~50/60Hz

Wireless Type:

Wi-Fi 2.4Ghz

(Signal Strength $\geq 75\%$)

Size:

2 Modular

Touch Surface ambient temp.:

30°C to 48°C

Working temp.:

-10°C to 70°C

Rated Load:


100w, Capacitor Based,
humming free

Approximate Weight:

85gms

Maximum Dimension:

48mm*50mm*50mm

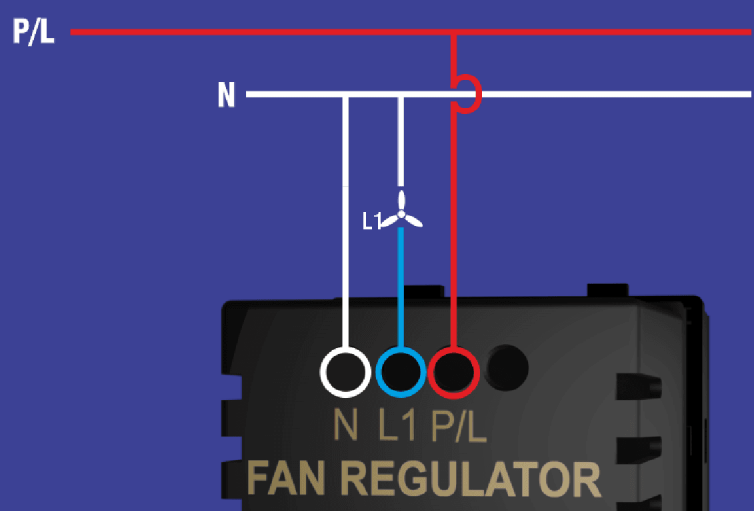

CURTAIN CONTROL

TECHNICAL SPECIFICATION

Input Voltage:
230V~50/60Hz

Working temp.:
-10°C to 70°C

Wireless Type:
Wi-Fi 2.4Ghz
(Signal Strength $\geq 75\%$)

Rated Load:
Inductive load
200 w


Size:
2 Modular



Approximate Weight:
85gms



Touch Surface ambient temp.:
30°C to 48°C

Maximum Dimension:
48mm*50mm*50mm

Motor Type:
3 wire, 230vac

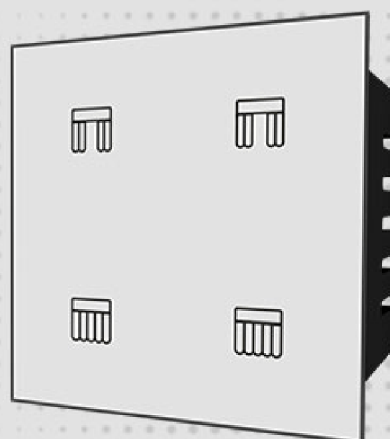

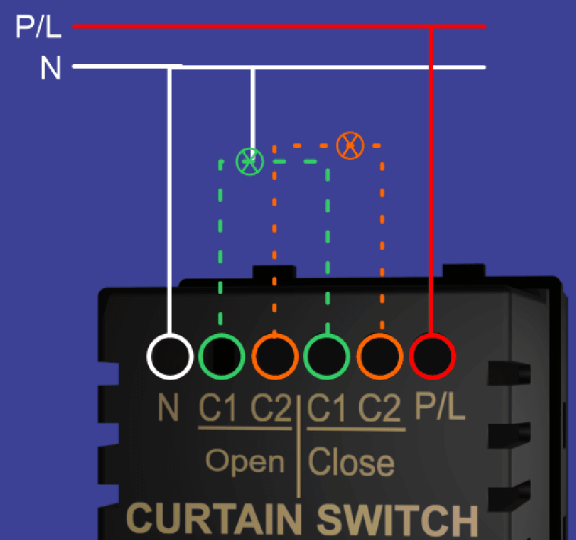

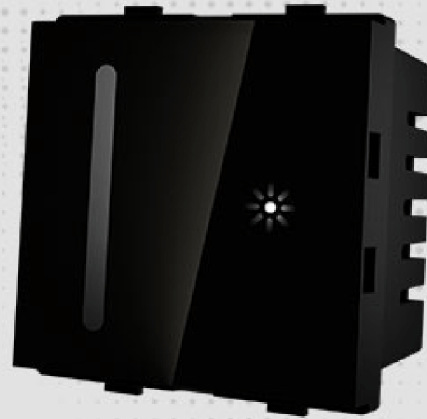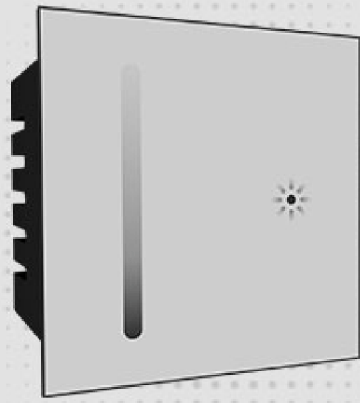

DIMMER SWITCH

TECHNICAL SPECIFICATION

Input Voltage:
230V~50/60Hz

Working temp.:
-10°C to 70°C

Wireless Type:
Wi-Fi 2.4Ghz
(Signal Strength $\geq 75\%$)


Rated Load:
160w, 880w per
terminal dimmable LED

Size:
2 Modular

Approximate Weight:
85gms

Touch Surface ambient temp.:
30°C to 48°C

Maximum Dimension:
48mm*50mm*50mm

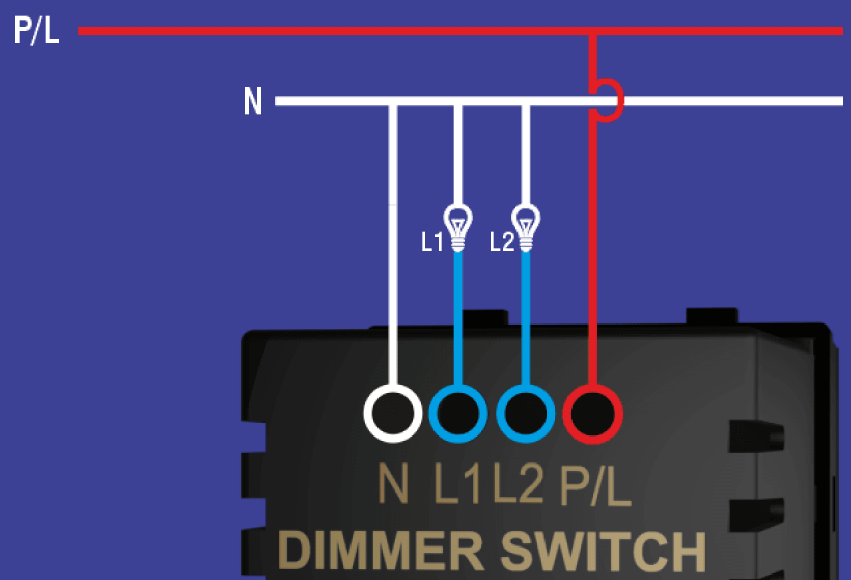

BELL SWITCH

TECHNICAL SPECIFICATION

Input Voltage:
230V~50/60Hz

Working temp.:
-10°C to 70°C

Maximum Dimension:
48mm*50mm*50mm


Rated Load:
200w

Size:
2 Modular

Approximate Weight:
85gms

Touch Surface ambient temp.:
30°C to 48°C



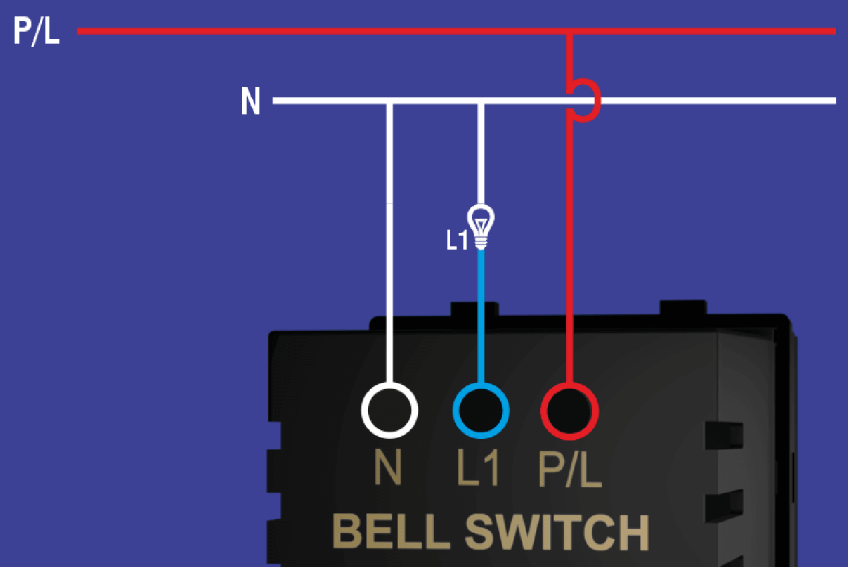

ZECK Features



Schedule

Weekly and Daily Scheduling, Facility allows you to turn ON/OFF your appliance automatically at scheduled time. For example if water supply comes at 6 AM you don't need to wake up at 6 AM, it can be started automatically at 6 AM and stop let's say 6.30 AM.



Scenario

Set scheduled/countdown timers to turn on/off at specified time and Share Control. Co0ntrol your smart home together with your family; Unique group / Scene function. You can divide devices in different ds or rooms. Turn on/off all the devices in group by one button.



Multiusers

Control your smart home together with your family; All family members can control with their respective mobile phone using same login credentials. It provides notification Facility (when you are away, you can get notification if someone is switching On/Off your appliances at your home).



Standard Modular Switch

Standard modular switches can be fit in any 51mm x 48mm standard existing modular switch plates. Modular nature of switches gives the user complete independence of choosing how many switches to change and in which fashion the switches are to be changed.



Control from Anywhere

Control anywhere to any time with your smart phone



Single App Control

Multiple appliances control with mobile application

ZECK Features



Voice Controlled

Voice controlled with Alexa & Google




Easy installation

Easy installation of ZECK switch make it cozy for everyone from user to electrician.



Home @ fingertips

Luxurious touch switches operated either with feather touch or with IR remote or mobile phone with IR transmitter makes the access to your home appliances convenient like never before.



Dual Color Backlit LED

Different colored indication LED makes it easy to locate switch state, light intensity, fan speed. LEDs make it easy to locate the switch in dark ambience.



Control from Anywhere

ZECK switches are provided with memory function to remember switch state in case of electricity failure. Memory function is easy to setup procedure by user. Memory function gives three options named on, off and auto.



Easy installation in existing wiring

ZECK switches are completely compatible with existing wiring of residential or commercial real estate. No need to change your existing home/office wiring. Just get a ZECK Switch and install it with ease in your existing electrical environment.

Comparison of **SWITCH**


DESCRIPTION	WIRED AUTOMATION	NON TOUCH	TOUCH SWITCHES
TOUCH	PARTIALLY	✗	✓
WIFI (ANDROID / IOS)	✓	✓	✓
VOICE COMMAND	✓	✓	✓
EXISTING WIRING	✗	✓	✓
NORMAL CONFIGURATION	✗	✓	✓
LIVE STATUS SHOWS ON MANUAL OPTION	PARTIALLY	✗	✓
UNLIMITED INTEGRATION IN SINGLE APP	✓	✗	✓
ASTHETIC LOOK OF SMART SWITCH	✓	✗	✓
INDIAN MODULAR STANDARD	✗	✗	✓
ASTHETIC LOOK OF SMART SWITCH	✗	✓	✓

COMPATIBLE PLATES & ACCESSORIES

Our product can be compatible with Roma Classic, Roma Allure, Roma Vetro (Glass plate), Hifi, Wonder, Rider, Vinay Adora, Panama 1000+, Richard Royal Rika, Alemac, Aonn, Fybros, Parcos, Vihan Ever, Vihan Forum, Vihan Flyoer, Vihan Flato, Sioma, Kolors KBC Vouge, Kolors KBC Selekt, Milltech, Pointer, Allwyn, Cona, Lisha, Netwit, Vankon, Red Card, Amaron, Vinayak, Maru Switches, Western Vintage, Western V-Wood, Livon, Philcon, litaski, Rapid electricals etc.







WORTHWHILE

1 BHK COST 10,800 INR

2 BHK COST 14,300 INR

3 BHK COST 18,100 INR

4 BHK COST 21,600 INR

Price calculation as follows: Single room contains 12 On/Off, 3 Fan. 2 BHK contains 16 On/Off, 4 Fan. 3 BHK contains 20 On/Off, 5 fan & 4 BHK contains 24 On/off, 6 Fan.

BE SMART...
MAKE YOUR HOME SMART...



SWITCH TO ZECK SWITCH

Registered Address

Block No-113, Near L&T Toll Plaza, NH48, At: Vadva,
Ta: Karjan-391240, Dist.: Vadodara, Gujarat, India.

www.zeckswitch.com | sales@zeckswitch.com
+91 84690 95929



/ ZeckSwitch



/ ZeckSwitch



/ ZeckSwitch